

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number  
**WO 01/99481 A2**

- (51) International Patent Classification<sup>7</sup>: **H05K 5/00**
- (21) International Application Number: **PCT/US01/16568**
- (22) International Filing Date: **21 May 2001 (21.05.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
**60/211,895** **16 June 2000 (16.06.2000)** **US**
- (71) Applicant: **THE DOW CHEMICAL COMPANY**  
[US/US]; 2030 Dow Center, Midland, MI 48674 (US).
- (72) Inventors: **TARNOWSKI, Thomas, J.**; 2619 Waldo Avenue, Midland, MI 48642 (US). **ALDEN, Tor, A.**; 2705 Crestwood Circle, Minnetonka, MN 55305 (US). **QUI, Shaohui**; 424 W. 24th Street, No. 101, Minneapolis, MN 55405 (US). **JOHNSON, Brett, R.**; 429 Front Avenue, Apartment No. 1, St. Paul, MN 55117 (US). **WILSON, James, A.**; 4045 Chowen Avenue South, Minneapolis, MN 55410 (US).
- (54) Agent: **CHRISTY, M., Robert**; The Dow Chemical Company, Intellectual Property, P.O. Box 1967, Midland, MI 48641-1967 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **FUNCTIONAL ENCLOSURE FOR A PERSONAL ELECTRONIC DEVICE**

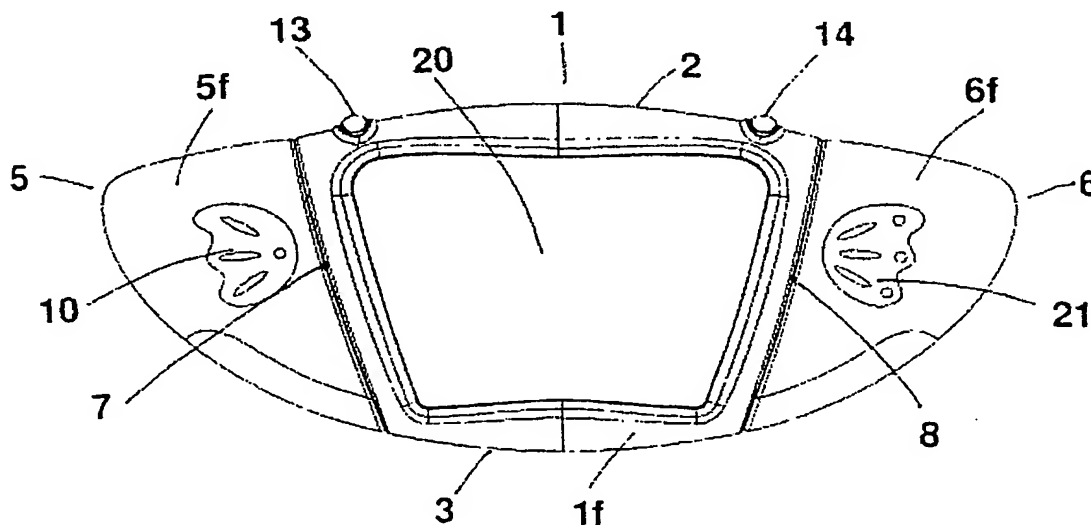

(57) Abstract: Disclosed is a configurable housing for a personal electronic device having multiple operating modes wherein the configuration of the housing determines the operating mode of the personal electronic device. Moreover, each configuration is well suited and easy to use for the selected operating mode.

WO 01/99481 A2

## FUNCTIONAL ENCLOSURE FOR A PERSONAL ELECTRONIC DEVICE

5           The present invention relates to a configurable housing for a personal electronic device.

          Personal electronic devices, such as cell phones, pagers, personal digital assistants (PDAs), gaming devices, electronic music players, voice recorders, and global positioning systems (GPS), have become common place in today's society. These personal electronic devices have found utility in all aspects of life including personal and/or professional activities. In fact, it's common for a person to possess two or more such personal electronic devices, for example it's not unusual to see a teenager or a stay at home parent or a business professional with a cell phone, a PDA, a gaming device and/or an electronic music player.

          While any one of these personal electronic devices can usually be carried conveniently by a person, either on a belt, in a pocket or hand bag, carrying multiple electronic devices becomes inconvenient at best, if not burdensome. Attempts to combine functions, or operating modes, into a single personal electronic device have met with limited functional, if not technical, success. For example, playing an electronic game using the keys of a keyboard, especially very small keys such as found on some personal electronic devices, can be difficult, frustrating and at the very least unenjoyable.

          The object of this invention is to present a configurable housing for a personal electronic device. A further object of this invention is to present a configurable housing for a personal electronic device having multiple operating modes wherein each configuration is well suited and easy to use for a particular operating mode. An object of this invention is also to present a configurable housing for a personal electronic device having multiple operating modes wherein the configuration of the housing determines the operating mode of the personal electronic device.

          In a preferred object of this invention, one or more configurable section(s) is detachable/attachable to the main body.

30           A more preferred object of this invention is a first personal electronic device having a configurable housing having a first set of one or more detachable/attachable configurable section(s) attached to a first main body, said first personal electronic device having more than one mode of operation, and a second personal electronic device having a second configurable housing having a second set of detachable/attachable configurable section(s) attached to a second main body, said second personal electronic device having more than

one mode of operation, wherein the operating modes for the first personal electronic device are the same, partially the same or different than the operating modes for the second personal electronic device, preferably, said first main body is the same as the second main body.

5           A further object of this invention is to present a method to prepare a configurable housing for a personal electronic device.

The objectives of the invention are achieved by a housing comprising a main body and one or more configurable sections.

Below the invention will be described in more detail with reference to the preferred  
10   embodiments shown as examples and to the enclosed figures, in which:

FIG. 1 shows schematically the front view of a configurable housing with 2  
configurable sections in a first configuration;

FIG. 2 shows schematically the bottom edge of the configurable housing of FIG. 1;

FIG. 3 shows schematically the back view of the configurable housing of FIG. 1;

15       FIG. 4 shows in a perspective view the configurable housing of FIG. 1;

FIG. 5 shows in a perspective view the configurable housing of FIG. 1 in a second  
configuration; and

FIG. 6 shows in a perspective view the configurable housing of FIG. 1 in a third  
configuration.

20       The configurable housing of the present invention comprises one or more  
configurable sections. As used herein, configurable section is defined to mean a section that  
can assume more than one spatial location in relationship to the main body of the housing.  
Any means to reconfigure a section versus the main body of the housing may be used, for  
example, rotating, sliding, bending, flexing, twisting, folding (with or without hinges),  
25   disconnecting, and disconnecting/reconnecting in a different spatial location. The number  
of configurable sections is dependent upon several considerations, for example, the number  
and types of operating modes for the personal electronic device or how many hands are  
require for a particular mode, that is, two hands (for example, gaming device), one hand (for  
example, cell phone) or no hands (for example, desktop PDA), if the personal electronic  
30   device is to be worn (for example, around the neck or wrist) or affixed to clothing (for  
example, on a belt or purse strap). There is no limit for the number of configurable  
sections, but generally there are between 1 to 10, preferably 1 to 5, more preferably 2 to 5  
and most preferably 2 to 4 configurable sections.

FIG. 1 and FIG. 3 show schematically the front and back surfaces of a configurable housing with main body 1 having a front surface 1f, a back surface 1b, a top edge 2 and a bottom edge 3, a first 5 and a second 6 configurable section, each having a front surface 5f and 6f and a back surface 5b and 6b. FIG. 4 shows in a perspective view the configurable housing of FIG. 1. FIG. 5 shows in a perspective view the configurable housing of FIG. 1 with the first and second configurable sections 5 and 6 reconfigured 90° from their first configuration. FIG. 6 shows in a perspective view the configurable housing of FIG. 1 with the first and second configurable sections 5 and 6 reconfigured 180° from their first configuration with the back surfaces of the first and second configurable sections 5b and 6b showing. Reconfiguration can be achieved by rotating the first and second sections 5 and 6 at points 7 and 8, respectively, while remaining attached to the main body or detaching them from the main body, rotating and reattaching them.

Preferably, the main body is capable of accepting one or more configurable section that is detachable and attachable. Any means for detaching/attaching or connecting such configurable sections is within the scope of this invention as long as the means provides for a way to (1) connect the detachable/attachable section to the main body, which allows for the detachable/attachable section to assume one or more configuration and the personal electronic device two or more modes of operation, for example, snap fits, flexible connectors, rotational connectors, ball and socket connectors, tongue and groove connectors, and slip joints, and (2) provides the necessary interface between the detachable/attachable configurable section and the main body to allow operability of the personal electronic device, for example an electronic interface, and an inferred interface. Preferably, the detachable/attachable section physically connects to the main body while maintaining the ability to assume more than one spatial location in relationship to the main body.

Preferably, there is a plurality of detachable/attachable configurable sections that can attach interchangeably to one or more main bodies. Different detachable/attachable configurable sections can contain different input and/or output means, which when attached to the main body can result in different modes of operation for the resulting personal electronic device.

For example, a first main body can accept a first set comprising one or more detachable/attachable configurable section(s) producing a first configurable housing for a first personal electronic device with two or more modes of operation. A second main body

can accept a second set of one or more detachable/attachable configurable section(s) producing a second configurable housing for a second personal electronic device having two or modes of operation. Preferably, the means to connect the first set of detachable/attachable configurable section(s) and the second set of detachable/attachable configurable section(s) are the same such that each set can interchangeably connect to either the first and second main bodies. The first main body may be the same, that is, in appearance, functions, electronic capabilities, structure, and design, or different, that is, in appearance, functions, electronic capabilities, structure, and design from the second main body, preferably the first main body is the same as the second main body. The modes of operation for the first personal electronic device with the first configurable housing may be the same, partially the same or different than the modes of operation for the second personal electronic device with the second configurable housing.

A further example is, a first detachable/attachable configurable section (1) comprises a memory/software bay, a second detachable/attachable configurable section (2) comprises a pivoting video camera, a third detachable/attachable configurable section (3) comprises a GPS navigational system, a fourth detachable/attachable configurable section (4) comprises a digital camera, a fifth detachable/attachable configurable section (5) comprises a barcode scanner, a sixth detachable configurable section (6) comprises a connector for docking, a seventh detachable/attachable configurable section (7) comprises a wireless web connection, an eighth detachable/attachable configurable section (8) comprises voice recognition capabilities, a ninth detachable/attachable configurable section (9) comprises a IR receiver and/or transmitter, a tenth detachable/attachable configurable section (10) comprises a MP3 player, an eleventh detachable/attachable configurable section (11) comprises one or more external body sensors, and a twelfth detachable/attachable configurable section (12) comprises an altimeter, wherein each detachable/attachable configurable section can be connected to the same or different main body, individually or in combination of two or more to provide a personal electronic device with two or more operating modes. Combinations of different detachable/attachable configurable sections interchangeably attached to a main body, such as a first main body plus sections (1) and (2), or the first main body plus sections (3) and (4), or the first main body plus sections (5), (6) and (7), or a second main body plus sections (8) and (9), or a third main body plus sections (10), (11) and (12), provide personal electronic devices with different operating modes.

In any functional configuration, or operating mode, the housing will comprise a user interface whereby the user interface comprises one or more input means and one or more indicator means. The configurable housing of the present invention comprises one or more user input means such as, but not limited to, a key pad, a key board, switch(es), button(s), a liquid crystal display (LCD), a stylus, a microphone, voice activation, inferred (IR) receiver, a scanner, a barcode scanner, a thermocouple, a digital camera, a video recorder, and a memory/software bay. For example, the configurable housing illustrated in FIG. 1 and FIG. 3 comprises a microphone 10 on the front surface of the first configurable section 5f, a cross-key switch 11 on the back surface of the first configurable section 5b, a push-button switch 12 on the back surface of the second configurable section 6b, a first 13 and a second 14 push-button switches on the top edge 2 of the main body. Additional input means (not shown) are present as needed.

The configurable housing of the present invention comprises one or more user indicator means such as, but not limited to, a LCD, a speaker, light(s), vibration means, a light emitting diode(s) (LED), and IR transmitter. For example, the configurable housing illustrated in the FIG. 1 comprises a LCD 20 on the front surface of the main body 1f and a speaker 21 on the front surface of the second configurable section 6f.

It is understood that an input means in one configuration may be an indicator means in another configuration and vice versa, that is, a LCD could be a key pad (input means) in a cell phone mode and a video screen (output means) in a game device mode.

Further, the configurable housing may contain other user input or indicator means or functionality not shown in the figures such as an on/off switch, a stylus, an integral antenna, a belt clip, a key ring, an ear piece holder or insertion ports, that can accommodate connectors to connect to other devices such as computers, scanners, fax machines, printers, copiers, ear phones, video players (VCR and/or DVD), and digital cameras.

Preferably, the configuration of the housing dictates the mode of operation of the personal electronic device. Further, it is possible to make the push-buttons possess different functions under program control and to dynamically change depending on the mode of operation. Thus, the different input and/or indicator means may have different functions depending on the mode of operation.

The following are examples of modes of operation for the personal electronic device of the present invention: electronic monitoring of natural and/or physiological conditions, storage/display of electronic information, wireless exchange of text and/or audio and/or

video information, audio and/or video storage and/or play-back, remote control of electronic devices, GPS navigation, mapping, barcode scanning, gaming, emergency distress signal, and record and/or display digital images.

The configurable housing of the present invention can be made from any suitable material of construction typically used for personal electronic device housings such as one or more metals, one or more plastics or combinations thereof. Plastics include both thermoplastics and thermosets and may be transparent, translucent, opaque or combinations thereof. Examples of suitable plastics are styrene based polymers including homopolymers (that is, general purpose polystyrene (PS), and rubber modified PS), copolymers (that is, styrene and acrylonitrile (SAN), styrene and maleic anhydride (SMA), acrylonitrile, butadiene and styrene (ABS) terpolymer), and alloys (that is, styrene and polyphenylene oxide (mPPO)); polyolefins including homopolymers (that is, polyethylene, polypropylene, and polybutadiene), copolymers (ethylene with vinyl acetate (E/VA), acrylic acid (E/AA), methacrylate (E/MA), propylene and diene (EPDM), and propylene (EP)) and modified polyolefins (that is, polyolefin elastomer (POE), and thermoplastic polyolefin (TPO)); polyvinyl chloride; polyester resins; polycarbonate (PC) based polymers including homopolymers (that is, bisphenol-A homopolymer) and blends (PC/ABS, and PC/polyester); acrylics; epoxy resins; urethanes; polyamides; silicones, polyarylsulfides; polyphenylene sulfides; polyarylethers; polymethacrylates; polyacrylates; and polyvinyl acetates. Preferred thermoplastics are PC and PC/ABS blends.

Plastic resins may also contain one or more additives that are commonly used in polymers of this type. Preferred additives of this type include, but are not limited to: pigments, dyes, fillers, reinforcements, ignition resistant additives, stabilizers, colorants, antioxidants, antistats, flow enhancers, mold releases, and nucleating agents. Preferred examples of fillers and or reinforcements are glass (fiber, bead, mat, and flake); wollastonite; clay; mica; carbon (carbon fibers, carbon black, and conductive carbon); talc; calcium carbonate; and metals. Additionally, ignition resistance additives, such as, but not limited to halogenated hydrocarbons, halogenated carbonate oligomers, halogenated diglycidyl ethers, organophosphorous compounds, fluorinated olefins, antimony oxide and metal salts of aromatic sulfur, or a mixture thereof may be used. Further, compounds which stabilize polymer blend compositions against degradation caused by, but not limited to heat, light, and oxygen, or a mixture thereof may be used.

The configurable housing of the present invention can be made from any suitable fabricating process depending on the material of choice, for example stamping, machining, die casting, and thixotropic metal injection molding for metals or injection molding (gas assist, and structural foam), thermoforming, compression molding, blow molding, vacuum molding, transfer molding, hand lay-up techniques, and spray-up techniques for plastics.

The configurable housings of the present invention may or may not be painted or some how coated for decorative, aesthetic (that is, soft touch, and luminescence) or functional (that is, conductive coating, and scratch resistance) purposes.

The configurable housing of the present invention would be suitable for enclosing personal electronic devices having one or more mode of operation such as found in gaming devices; PDAs; electronic picture frames; clocks, calendars, speaker phones, hand-held digital cameras; electronic music players; voice recorders; radios; optical scanners; wireless cellular communications including but not limited to voice communications (for example, cell phones), music, images, video, software, data, weather information, clock synchronization signals, global positioning signals, and faxes; and as a remote control (that is, for controlling televisions, video equipment, stereo components, garage door openers, or home automation systems).

#### EXAMPLE

The personal electronic device illustrated in FIG. 4 possess a cell phone configuration/mode, in FIG. 5 a PDA configuration/mode and in FIG. 6 a gaming configuration/mode. Additional push-buttons and/or switches (not shown) may be present for other functions, for example, an on/off switch, a game start switch, a game selection switch, or a switch to pause the game. There may be multiple push-buttons and/or switches, each having a single function or one or more push-buttons and/or switches programmed with multiple functions.

With the configurable sections 5 and 6 rotated so the back surfaces 5b and 6b are aligned with the front surface of the main body 1f (FIG. 6) the personal electronic device is configured to operate in a gaming mode. In this mode the cross-key switch 11 has four direction designating portions or contacts and, by depressing any one of the same, it is possible to, for example, move a game character displayed on LCD panel 20 upward or downward or leftward or rightward. In addition, push-button switches 13 and 14 are provided on the top edge of the main body. These push-button switches 13 and 14 are operated when it is necessary to control the game character being displayed on the LCD



panel 20 to perform various predetermined actions. For example, when the push-button switch 13 is depressed, the displayed character may appear to jump, or when the push-button switch 14 is depressed, the character may appear to throw a stone, or a ball, or launch various other objects. Thus, the cross-key switch 11 is disposed to be operated by the  
5 thumb of the left hand, which sandwiches the case 1 in cooperation with the right hand, and the push-button switches 13 and 14 are disposed to be operated by the forefinger of the left and right hands, respectively.

With the configurable sections 5 and 6 rotated 90° to the main body (FIG. 5) the personal electronic device is configured to operate in a PDA mode. The user interface  
10 comprises an LCD 20 which functions as a touch sensitive numerical key pad/alphanumeric display and push-buttons 13 and 14 are used to access different applications such as an Phone/Address Book, Calendar, or Calculator modes.

With the configurable sections 5 and 6 rotated so the front surfaces 5f and 6f are aligned with the front surface of the main body (FIG. 4) the personal electronic device is  
15 configured to operate in a cell phone mode. The user interface comprises a microphone 10, speaker 21, LCD 20 which functions as a touch sensitive numerical keypad and/or optionally as an alphanumeric display and control keys 13 and 14.

## CLAIMS:

1. A configurable housing for a personal electronic device.
2. The configurable housing according to Claim 1 comprising a main body and one or more configurable sections.
- 5 3. The configurable housing according to Claim 1 wherein the personal electronic device has more than one mode of operation.
4. The configurable housing according to Claim 3 wherein the configuration of the housing determines the mode of operation of the personal electronic device.
5. The configurable housing according to Claim 2, 3 or 4 wherein one or more
- 10 configurable sections is detachable/attachable to the main body.
6. The detachable/attachable configurable section of Claim 5.
7. A means for detaching and attaching the detachable/attachable configurable sections of Claim 5 to the main body.
8. The main body of Claim 5 capable of accepting one or more
- 15 detachable/attachable configurable sections.
9. A first configurable housing for a first personal electronic device according to Claim 5 having a first set of one or more detachable/attachable configurable section(s) attached to a first main body, said first personal electronic device having more than one mode of operation and a second configurable housing for a second personal electronic
- 20 device according to Claim 5 having a second set of detachable/attachable configurable section(s) attached to a second main body, said second personal electronic device having more than one mode of operation, wherein the operating modes for the first personal electronic device are the same, partially the same or different than the operating modes for the second personal electronic device, and the first main body is the same as the second
- 25 main body.
10. The configurable housing of Claim 3 or 4 wherein the personal electronic device has two or more of the following modes of operation: electronic monitoring of natural and/or physiological conditions, storage/display of electronic information, wireless exchange of text and/or audio and/or video information, audio and/or video storage and/or
- 30 play-back, remote control of electronic devices, GPS navigation, mapping, barcode scanning, gaming, emergency distress signal, or record and/or display digital images.
11. The configurable housing of Claim 5 wherein the personal electronic device has two or more of the following modes of operation: electronic monitoring of natural

and/or physiological conditions, storage/display of electronic information, wireless exchange of text and/or audio and/or video information, audio and/or video storage and/or play-back, remote control of electronic devices, GPS navigation, mapping, barcode scanning, gaming, emergency distress signal, or record and/or display digital images.

- 5           12.     The configurable housing of Claim 1 wherein the personal electronic device has a liquid crystal display and one or more of the following input and/or indicator means: digital camera, video recorder, audio recorder, speaker, keypad, microphone, keyboard, switch, button, inferred transmitter and/or receiver, scanner, barcode scanner, thermocouple, or stylus.
- 10           13.     A configurable housing for a personal electronic device comprising one or more thermoplastic polymers.
14.     A configurable housing for a personal electronic device comprising a polycarbonate resin and an acrylonitrile, butadiene and styrene terpolymer blend (PC/ABS).
15.     A method to prepare a configurable housing for a personal electronic device.

1/2

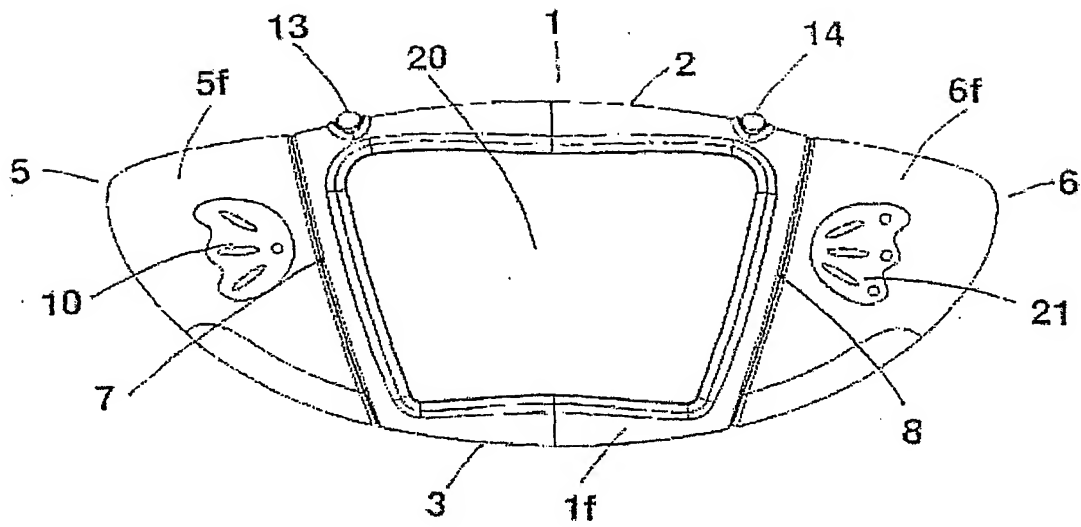


FIG. 1

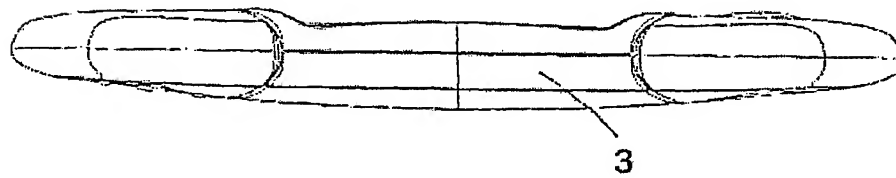


FIG. 2

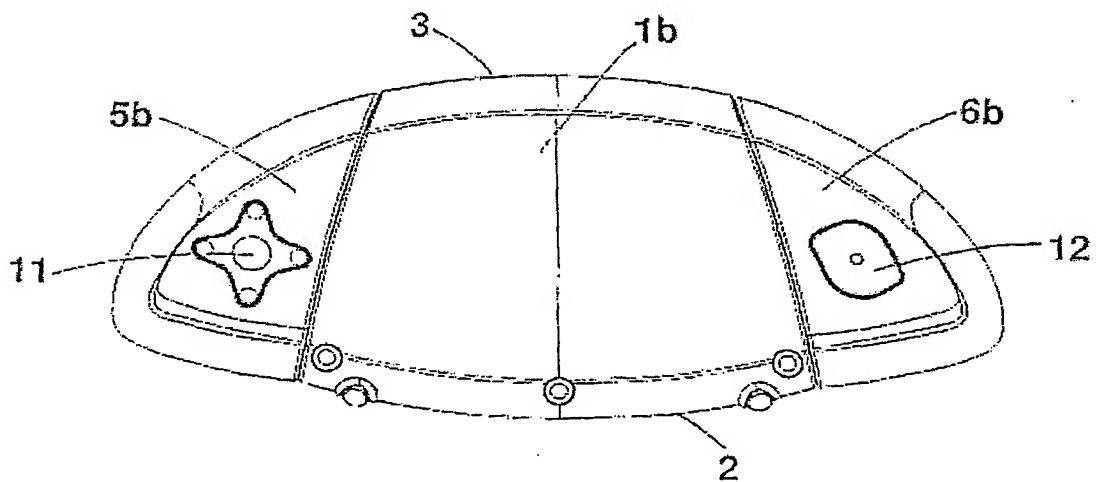


FIG. 3

2/2

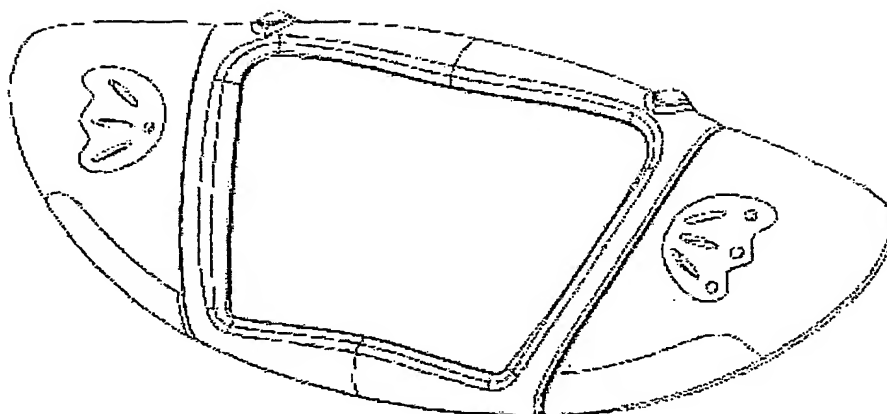


FIG. 4

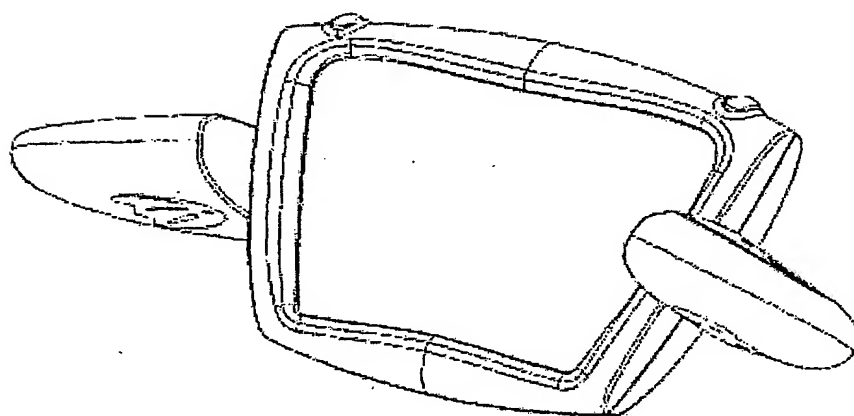


FIG. 5

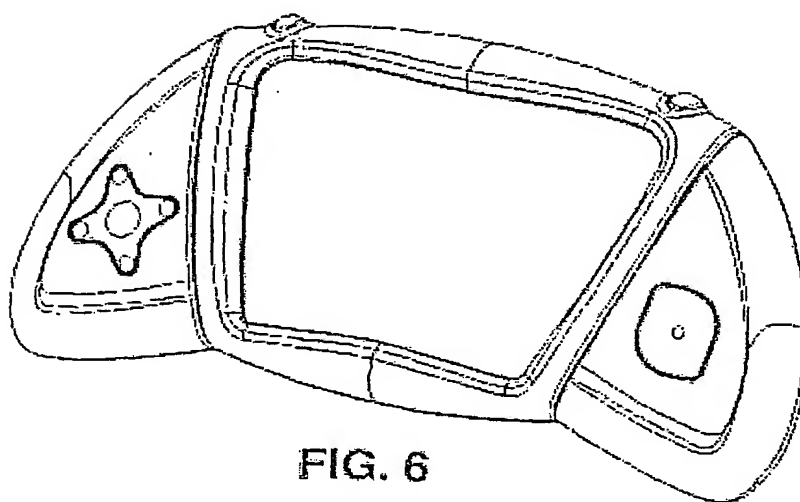


FIG. 6

**THIS PAGE BLANK (USPTO)**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number  
**WO 01/99481 A3**

(51) International Patent Classification<sup>7</sup>: H05K 5/00,  
H04M 1/02, A63F 13/08, G06F 1/16

(21) International Application Number: PCT/US01/16568

(22) International Filing Date: 21 May 2001 (21.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/211,895 16 June 2000 (16.06.2000) US

(71) Applicant: THE DOW CHEMICAL COMPANY  
[US/US]; 2030 Dow Center, Midland, MI 48674 (US).

(74) Agent: CHRISTY, M., Robert: The Dow Chemical Company, Intellectual Property, P.O. Box 1967, Midland, MI 48641-1967 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(88) Date of publication of the international search report:  
23 May 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventors: TARNOWSKI, Thomas, J.; 2619 Waldo Avenue, Midland, MI 48642 (US). ALDEN, Tor, A.; 2705 Crestwood Circle, Minnetonka, MN 55305 (US). QUI, Shaohui; 424 W. 24th Street, No. 101, Minneapolis, MN 55405 (US). JOHNSON, Brett, R.; 429 Front Avenue, Apartment No. 1, St. Paul, MN 55117 (US). WILSON, James, A.; 4045 Chowen Avenue South, Minneapolis, MN 55410 (US).

(54) Title: FUNCTIONAL ENCLOSURE FOR A PERSONAL ELECTRONIC DEVICE

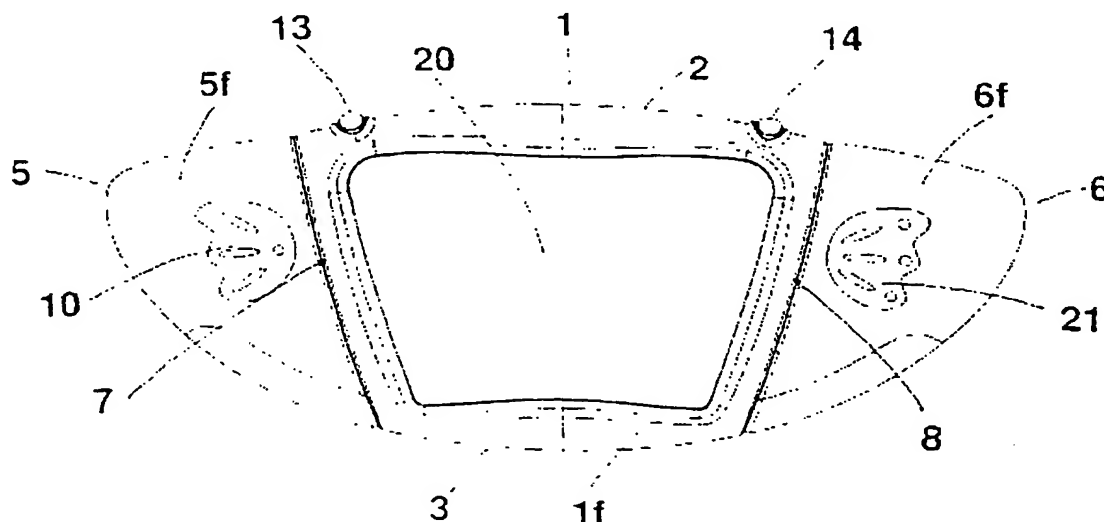

(57) Abstract: Disclosed is a configurable housing for a personal electronic device having multiple operating modes wherein the configuration of the housing determines the operating mode of the personal electronic device. Moreover, each configuration is well suited and easy to use for the selected operating mode.

WO 01/99481 A3

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 01/16568

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H05K5/00 H04M1/02 A63F13/08 G06F1/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H05K H04M A63F G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 579 487 A (MEYERSON ROBERT F ET AL) 26 November 1996 (1996-11-26) the whole document	1-12,15 13,14
Y	DE 32 23 134 A (SIEMENS AG) 22 December 1983 (1983-12-22) the whole document	13,14
X	US 5 202 817 A (CARGIN JR KEITH K ET AL) 13 April 1993 (1993-04-13) the whole document	1-12
X	US 4 237 540 A (SATO MASAOKI) 2 December 1980 (1980-12-02) the whole document	1,12,15
	--- -/-	

☒ Further documents are listed in the continuation of box C

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

17 December 2001

Date of mailing of the international search report

28/12/2001

Name and mailing address of the ISA  
European Patent Office, P.B 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Toussaint, F



# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/16568

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DE 92 15 398 U (HARTUNG SPIELE BERLIN &amp; EXIM DESIGN VERTRIEBGESELLSCHAFT MBH) 4 February 1993 (1993-02-04) the whole document</p> <p>-----</p>	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/16568

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5579487	A	26-11-1996	US 5825617 A US 5594470 A US 6215475 B1	20-10-1998 14-01-1997 10-04-2001
DE 3223134	A	22-12-1983	DE 3223134 A1	22-12-1983
US 5202817	A	13-04-1993	US 6244512 B1 US 5418684 A US 5539193 A US 5872354 A US 5530619 A US 5805474 A US 5834753 A US 5539194 A US 5898162 A US 5679943 A US 5949056 A US 5793604 A US 5917175 A US 6023147 A US 5914481 A US 5349497 A AU 654109 B2 AU 5856390 A CA 2020357 A1 CA 2022976 A1 EP 0667019 A1 WO 9016033 A1 US 5517434 A US 5673031 A US 5515303 A US 5747786 A US 5979768 A US 5602456 A US 5410141 A US 5305181 A CA 2018154 A1 US 5587577 A AU 9160291 A WO 9210803 A1	12-06-2001 23-05-1995 23-07-1996 16-02-1999 25-06-1996 08-09-1998 10-11-1998 23-07-1996 27-04-1999 21-10-1997 07-09-1999 11-08-1998 29-06-1999 08-02-2000 22-06-1999 20-09-1994 27-10-1994 08-01-1991 08-12-1990 08-12-1991 16-08-1995 27-12-1990 14-05-1996 30-09-1997 07-05-1996 05-05-1998 09-11-1999 11-02-1997 25-04-1995 19-04-1994 08-12-1990 24-12-1996 08-07-1992 25-06-1992
US 4237540	A	02-12-1980	JP 1290224 C JP 54116213 A JP 60014433 B	14-11-1985 10-09-1979 13-04-1985
DE 9215398	U	04-02-1993	DE 9215398 U1	04-02-1993